




ST. CHARLES, IL · SINCE 2003

B&C - MICRO SPEC SHEETS

MICRO COUPLER Product Spec Sheets

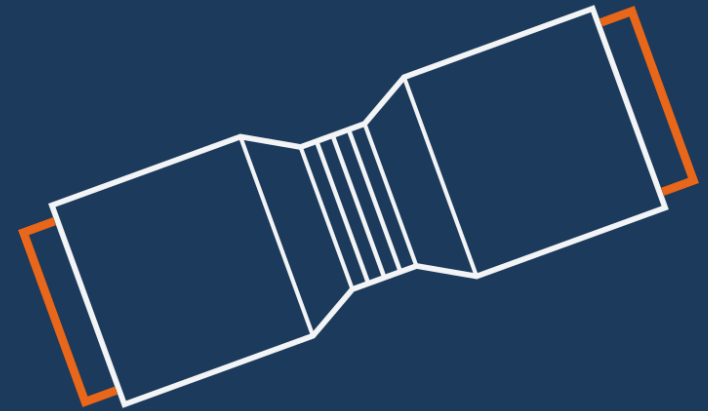

INCLUDED IN THIS COLLECTION

8.5mm

10mm

12mm

12.7mm

14mm

16mm

18mm

22mm

27mm



MICRO COUPLER
8.5mm Straight Coupler
BCA8.5MUC8.5



PERFORMANCE

Contained rating	175 PSI
Pass through rating	350 PSI
Conduit OD range	8.36mm – 8.62mm
Pull out strength	>152 lbs.

NOTES

- American made and assembled.
- Dielectric construction is designed to reduce electrical conductivity.
- Plastic grips are stronger than metal grips.





ST. CHARLES, IL • SINCE 2003

10mm Coupler
BCA10MUC10 — Red Grips

MICRO COUPLER

10mm Straight Coupler

BCA10MUC10



PERFORMANCE

Contained rating	175 PSI
Pass through rating	350 PSI
Conduit OD range	9.86mm – 10.19mm
Pull out strength	>171 lbs.

NOTES

- American made and assembled.
- Dielectric construction is designed to reduce electrical conductivity.
- Plastic grips are stronger than metal grips.





ST. CHARLES, IL • SINCE 2003

12mm Coupler
BCA12MUC12 — Black Grips

MICRO COUPLER

12mm Straight Coupler

BCA12MUC12



PERFORMANCE

Contained rating	175 PSI
Pass through rating	350 PSI
Conduit OD range	11.86mm – 12.17mm
Pull out strength	>177 lbs.

NOTES

- American made and assembled.
- Dielectric construction is designed to reduce electrical conductivity.
- Plastic grips are stronger than metal grips.





ST. CHARLES, IL · SINCE 2003

12.7mm Coupler
BCA12.7MUC12.7 — Grey Grips

MICRO COUPLER

12.7mm Straight Coupler

BCA12.7MUC12.7



PERFORMANCE

Contained rating	175 PSI
Pass through rating	350 PSI
Conduit OD range	12.56mm – 12.87mm
Pull out strength	>185 lbs.

NOTES

- American made and assembled.
- Dielectric construction is designed to reduce electrical conductivity.
- Plastic grips are stronger than metal grips.





ST. CHARLES, IL · SINCE 2003

14mm Coupler

BCA14MUC14 — Yellow Grips

MICRO COUPLER

14mm Straight Coupler

BCA14MUC14



PERFORMANCE

Contained rating	175 PSI
Pass through rating	350 PSI
Conduit OD range	13.86 – 14.12 mm
Pull out strength	>207 lbs.

NOTES

- American made and assembled.
- Dielectric construction is designed to reduce electrical conductivity.
- Plastic grips are stronger than metal grips.





ST. CHARLES, IL · SINCE 2003

16mm Coupler
BCA16MUC16 — Orange Grips

MICRO COUPLER

16mm Straight Coupler

BCA16MUC16



PERFORMANCE

Contained rating	175 PSI
Pass through rating	350 PSI
Conduit OD range	15.86 – 16.10 mm
Pull out strength	>196 lbs.

NOTES

- American made and assembled.
- Dielectric construction prevents lightning strikes.
- Plastic grips are stronger than metal grips.





ST. CHARLES, IL · SINCE 2003

MICRO COUPLER
18mm Straight Coupler
BCA18MUC18



PERFORMANCE

Contained rating	175 PSI
Pass through rating	350 PSI
Conduit OD range	17.86mm – 18.13mm
Pull out strength	220 lbs.

NOTES

- American made and assembled.
- Dielectric construction is designed to reduce electrical conductivity.
- Plastic grips are stronger than metal grips.





ST. CHARLES, IL • SINCE 2003

22mm Coupler
BCA22MUC22 — Pink Tips

MICRO COUPLER

22mm Straight Coupler

BCA22MUC22



PERFORMANCE

Contained rating	175 PSI
Pass through rating	350 PSI
Conduit OD range	21.85mm – 22.15mm
Pull out strength	160 lbs.

NOTES

- American made and assembled.
- Dielectric construction is designed to reduce electrical conductivity.
- Plastic grips are stronger than metal grips.





ST. CHARLES, IL · SINCE 2003

27mm P2C Coupler
P2C-27mm — Orange End Caps

PUSH2CONNECT COUPLER

27mm Coupler

P2C-27mm



PERFORMANCE

Pass through rating	350 PSI
Contained rating	175 PSI
Conduit OD range	26.70mm – 27.70mm
Pull out strength	>600 lbs.

NOTES

- American made and assembled.
- Dielectric construction is designed to reduce electrical conductivity.
- Plastic grips are stronger than metal grips.
- P2C couplers use U-cups instead of O-rings.
 - U-cups expand when air is applied.
 - U-cups create a better seal around ducts.

